

LESKHOZINVEST

Product Catalogue



# SAWN TIMBER



**Pine**

LESKHOZINVEST sells sawn timber and other wood-based products.

**Spruce**

The forest fund is located in the Sverdlovsk region, known for its unique wood species. The portfolio of tree species in our forest includes pine, spruce, fir, larch, cedar, aspen and birch.

**Cedar**

The Ural forests are renowned for their robust, reliable, temperature-resistant wood. It possesses increased strength and resistance to pests. The wood from Ural forests meets high operational requirements set for wooden construction materials.

**Fir**

We guarantee supply of high quality softwood and hardwood timber through the application of modern sawmill technologies and extensive experience. Our company's products are available for purchase both in the domestic market and for export.

**Larch**

**Aspen**

**Birch**



## SAWN TIMBER RANGE

### Edged board



Kiln dried softwood



Fresh softwood



Fresh hardwood

### Beam



Kiln dried softwood



Fresh softwood



Fresh hardwood



# EDGED BOARD



# KILN DRIED SOFTWOOD BOARD


Cross section: (18-75) x (75-250) mm  
 Length: 3-6 m  
 Wood species: pine, spruce, larch, cedar  
 Product grade: I, II, III, VI  
 Humidity: 8-18%  
 Surface roughness: ≤ 1250 microns



## APPLICATION



Exterior finishing

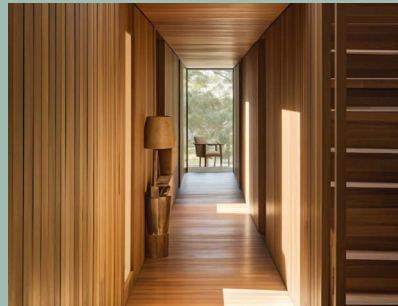

Interior finishing



Furniture manufacturing

## Board cross section

Width, mm	Thickness, mm										
	18	22	25	32	38	42	44	47	50	63	75
75											
90											
100											
110											
125											
140											
150											
175											
200											
225											
250											

It is possible to manufacture sawn timber according to the individual dimensions specified by the customer, including kiln dried planed boards from softwood

# FRESH SOFTWOOD BOARD



Cross section: (18-75) x (75-250) mm  
 Length: 3-6 m  
 Wood species: pine, spruce, larch, cedar  
 Product grade: I, II, III, VI  
 Humidity: 30–80%  
 Surface roughness: ≤ 1250 microns

## APPLICATION



Scaffolding and formworks



Furniture and wooden crate



Wooden fences and railings

## Board cross sections

Width, mm	Thickness, mm										
	18	22	25	32	38	42	44	47	50	63	75
75											
90											
100											
110											
125											
140											
150											
175											
200											
225											
250											

It is possible to manufacture sawn timber according to the individual dimensions specified by the customer

# FRESH HARDWOOD BOARD

Cross section: (18-75) x (75-150) mm  
 Length: 3-6 m  
 Wood species: aspen, birch  
 Product grade: I, II, III  
 Humidity: 30–80%  
 Surface roughness: ≤ 1250 microns



## APPLICATION



Scaffolding and formworks



Furniture and wooden crate manufacturing



Wooden fences and railings

## Board cross sections

Width, mm	Thickness, mm										
	18	22	25	32	38	42	44	47	50	63	75
75											
90											
100											
110											
125											
140											
150											

It is possible to manufacture sawn timber according to the individual dimensions specified by the customer



**BEAM**

---




# KILN DRIED SOFTWOOD BEAM



Cross section: (75-150) x (75-250) mm  
 Length: 3-6 m  
 Wood species: pine, spruce, fir, larch, cedar  
 Product grade: I, II, III, VI  
 Humidity: 18%  
 Surface roughness: ≤ 1250 microns

## APPLICATION

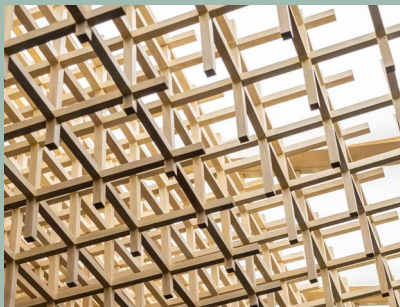

Structural elements



Roofing houses, windows and doors



Pallet and crate manufacturing

## Beam cross sections

Thickness, mm	Width, mm			
	75	90	100	150
75				
90				
100				
150				
200				
250				

It is possible to manufacture sawn timber according to the individual dimensions specified by the customer



# FRESH SOFTWOOD BEAM

Cross section: (75-160) x (75-250) mm  
 Length: 3-6 m  
 Wood species: pine, spruce, fir, larch, cedar  
 Product grade: I, II, III, VI  
 Humidity: 30-80%  
 Surface roughness: ≤ 1250 microns

## APPLICATION



Structural elements



Furniture making



Shipbuilding

## Beam cross sections

Width, mm	Thickness, mm				
	75	90	100	150	160
75					
90					
100					
110					
140					
150					
160					
200					
250					

It is possible to manufacture sawn timber according to the individual dimensions specified by the customer

# FRESH HARDWOOD BEAM

Cross section: (75-150) x (75-250) mm  
 Length: 3-6 m  
 Wood species: aspen, birch  
 Product grade: I, II, III  
 Humidity: 30-80%  
 Surface roughness: ≤ 1250 microns



## APPLICATION



Manufacturing windows and doors



Structural elements of houses and bathhouses



Decorative finishing

## Beam cross sections

Width, mm	Thickness, mm			
	75	90	100	150
75				
90				
100				
150				
200				
250				

It is possible to manufacture sawn timber according to the individual dimensions specified by the customer

LESKHOZINVEST

Ul. Lesnaya, 3, Verkhnyaya Tura  
Sverdlovsk oblast, RUSSIA, 624320

[www.lhi.global](http://www.lhi.global)  
mail: [lhi@lhi.global](mailto:lhi@lhi.global)

+7 912 21 00 888